

Split Solar Street Light A28

Jiangmen Qichen Lighting | Solar LED Street Lighting | Since 2010



Positioning: Rural footpaths and narrow village lanes (pedestrians and light motorcycle traffic)

Key highlights

Split design	Split design: separate solar panel and lamp body.
IP65 weatherproof	Sealed housing rated IP65 for outdoor installation.
5-Year Limited Warranty	Backed by a 5-Year Limited Warranty and 10–12 h full-power runtime.
CE & RoHS certified	Compliant with CE and RoHS requirements for EU and general export markets.

MOQ 50 units | Lead time 15 days | Payment T/T 30% deposit + 70% before shipment | Model range: 445 / 510 mm

Specification & Selection Guide

Split Solar Street Light A28, 2 size configurations.

Model	LED Power	Luminous Flux	Solar Panel	Battery	Lamp Size (L x W x H)	Installation Height	Pole Diameter	Pole Spacing
445mm Model (QC-SL022-150WS)	10 W	1300lm	20 W	15Ah	445 x 180 x 60 mm	3–4m	60 mm	12–15m
510mm Model (QC-SL022-200WS)	12 W	1560lm	25 W	20Ah	510 x 210 x 60 mm	3–4m	60 mm	12–16m

All configurations use a monocrystalline solar panel, a Brand-new Grade A LiFePO4 battery. Charging time 5–6 h, runtime 10–12 h at full charge.

Construction	split	Ingress protection	IP65
Material	aluminum alloy shell + PC diffusion plate	Warranty	5-Year Limited Warranty
Battery type	Brand-new Grade A LiFePO4	Certification	CE & RoHS certified

Product detail



Split panel and lamp body

Split-type design: the solar photovoltaic panel and the LED lamp body are mounted separately and joined by cable, so the panel can be aimed for maximum sun exposure independently of the luminaire.

Note: dimensional drawings (top / front / side views) are available on request. The table above gives exact body dimensions for every size configuration.


Certification & Applications

CE & RoHS certified	IP65
Compliance with CE (EMC & LVD) and RoHS directives for the European market.	Dust-tight and weather-protected housing for outdoor installation.

Certificate numbers are available on request - please contact us for the current test reports and declaration of conformity.

- 1 Courtyards
- 2 Field walkways
- 3 In-village footpaths
- 4 Narrow village lanes (pedestrians and light motorcycle traffic)

Product appearance

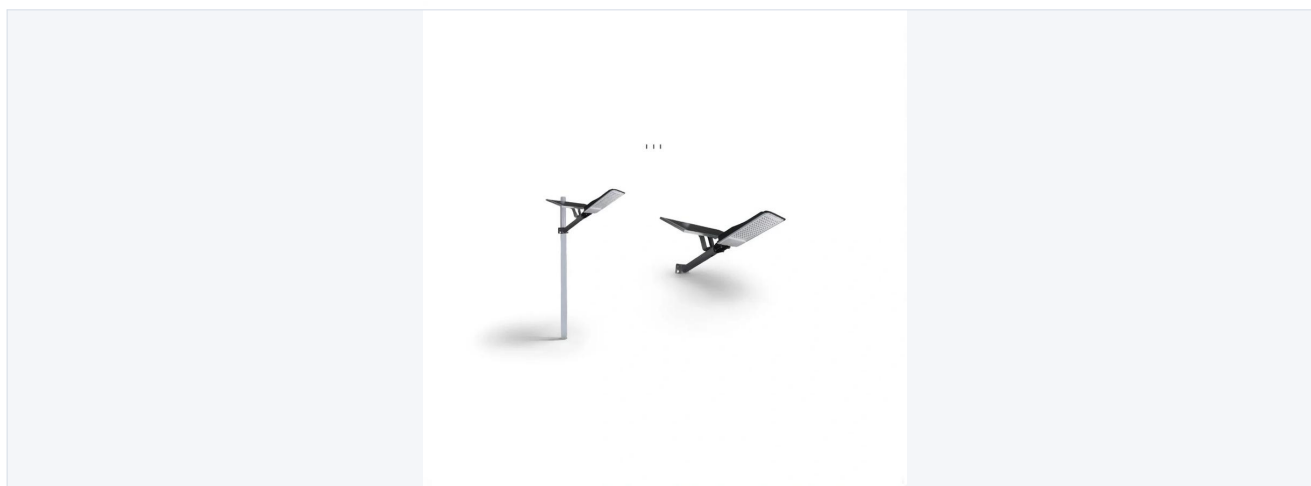

Packing: every configuration ships in a master carton of 10 pcs. Master carton dimensions - 445 mm tier: 46×37×39 cm; 510 mm tier: 52.5×37.5×45 cm. Bulk packing and OEM packaging are available on request.